

MB1



**Wildlife Lighting
Certification Number
#2017-011**

The MB1 is an unobtrusive, contemporary pathlight/bollard hybrid. It features 180° illumination via the field-rotatable top assembly. Its 1/2" male thread allows mounting onto a heavy-duty ground spike or brass junction box that can be recessed in concrete. MB-series bollards set the standard for durable, corrosion-resistant walkway lighting.



Construction All brass components. 1.6" diameter x 0.125" wall (41 mm x 3.2 mm) brass cylindrical housing.

Lens Clear cylindrical Borosilicate glass, 3mm wall thickness. Additional 3mm thick flat tempered soda lime glass to permanently seal lamp compartment.

Overall Height 16.9" (nominally 17") is standard. Custom heights available.
 ___ **17** 16.9" [42.8cm] Standard
 ___ Custom height, in inches


Voltage
 ___ **12V** 12 Volts AC, remote transformer required
 ___ **120V** 120 Volts with integral transformer
 ___ **230V** 230 Volts with integral transformer
 ___ **277V** 277 Volts with integral transformer

Lamp
 Cree XPE2 light engine
 ___ **2W-A** 2 Watt AMBER (1500K)

Mounting Accessories 1/2" male threads. Mounts into any standard j-box or:
 ___ **GS2BC** Heavy-duty ground spike with cast brass cap
 ___ **JB** Cast brass junction box (to be set in concrete)

Finish Unfinished is standard, no specification required.
 ___ **FIN-BK** Black Acid Finish
 ___ **FIN-DB** Dark Bronze Acid Finish
 ___ **FIN-NK** Satin Nickel Plating

The fixture will weather to a natural patina. The patina process is natural with brass and copper. Rate of patina and eventual color is dependent upon climate and proximity to the ocean. Thus, Beachside does not guarantee any specific appearance.

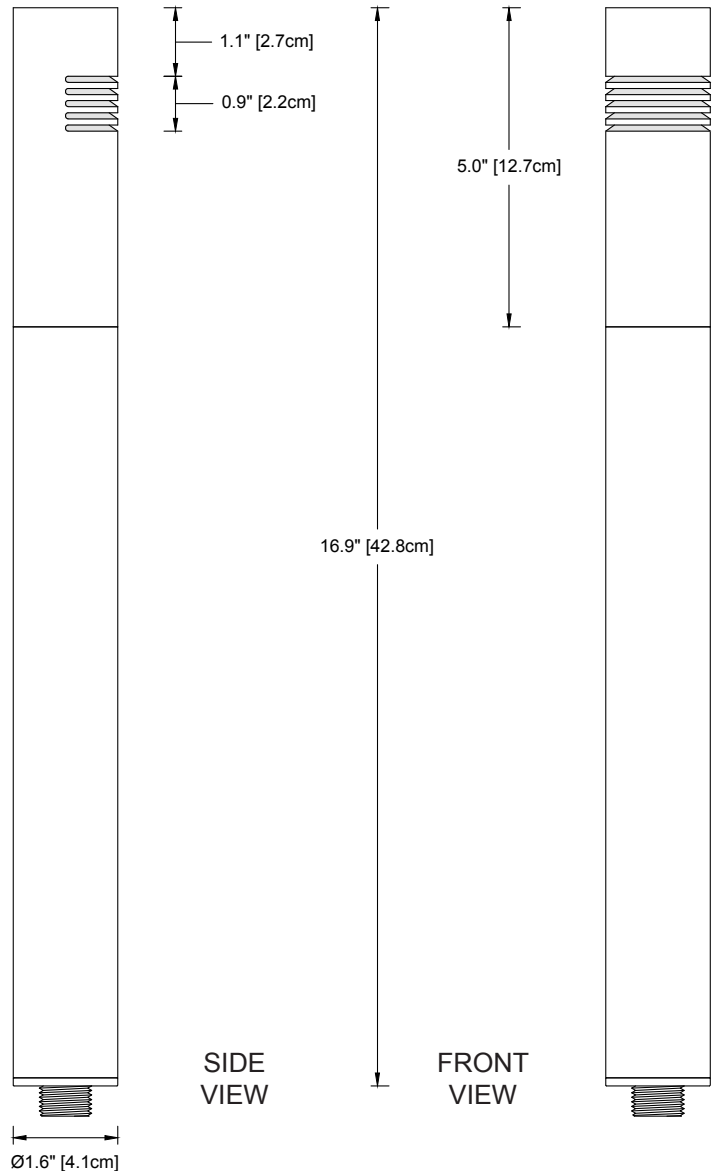

10 year fixture warranty
 5 year Cree LED module warranty

MADE IN USA

Project		By		Date	
For ordering purposes, please specify (example: MB1-17-120V-2W-A-GS2BC-FIN-NK)					
MB1	Height	Voltage	Lamp	Accessory	Finish (if any)
Fixture					